





Video Solution on Website :-	https://physicsaholics.com/home/courseDetails/97		
Video Solution on YouTube:-	https://youtu.be/x2whidTrqj8		
Written Solution on Website:-	https://physicsaholics.com/note/notesDetalis/51		

Q 1. Same current i=2A is flowing in a wire frame as shown in figure. The frame is a combination of two equilateral triangles ACD and CDE of side 1m. It is placed in uniform magnetic field B = 4 T acting perpendicular to the plane of frame. The magnitude of magnetic force acting on the frame is:

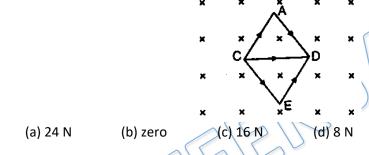

Q 2. A current carrying wire PQ is placed near an another long current carrying wire RS. If free to move, wire PQ will have:

- (a) translational motion only
- (b) rotational motion only
- (c) translational as well as rotational motion
- (d) neither translational nor rotational motion
- Q 3. A conducting rod of mass m and length *l* is placed over a smooth horizontal source. A uniform magnetic field B is acting perpendicular to the rod. Charge q is suddenly passed through the rod and it acquires an initial velocity v on the surface, then q is equal to: (a)  $\frac{2mv}{Bl}$  (b)  $\frac{Bl}{2mv}$  (c)  $\frac{mv}{Bl}$  (d)  $\frac{Blv}{2m}$
- Q 4. A conducting wire bent in the form of a parabola  $y^2 = 2x$  carries a current i = 2A as shown in figure. This wire is placed in a uniform magnetic field  $\vec{B} = -4\hat{k}$  tesla. The magnetic force on the wire is: (in newton)

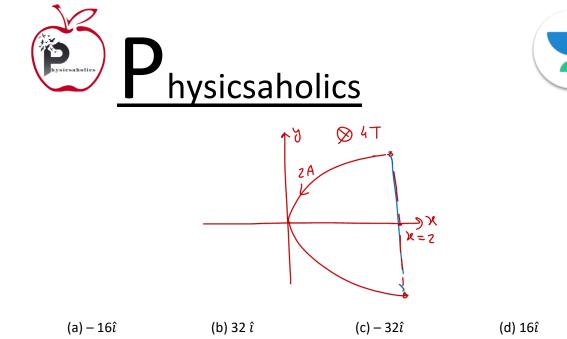

Q 5. A semi circular current carrying wire having radius R is placed in x-y plane with its centre at origin 'O'. There is non-uniform magnetic field  $\vec{B} = \frac{B_0 x}{2R}$  (here B<sub>0</sub> is +ve constant) is existing in the region. The magnetic force acting on semi circular wire will be along –

+R.0,0)

D

(c) – y-axis

(d) + x-axis

- (a) x-axis
- Q 6. An infinite wire carrying current L passes through point O perpendicular to the plane containing a current carrying loop ABCD as shown in the figure.


(-R.0.0)

(b) + y-axis


- (a) Net force on the loop is zero
- (b) Net torque on the loop is zero
- (c) The loop rotates in anticlockwise direction as seen from O

1

- (d) The loop rotates in clockwise direction as seen from O
- Q 7. Point 1 is at middle of solenoid, point (2) at an end face and point (3) is outside the solenoid at a distance a. Plane of coil and plane of cross-section of solenoid are parallel –



- (a) Force between coil and solenoid is attractive at all three points (i.e. 1, 2, 3)
- (b) Force between coil and solenoid at the point 1 is zero
- (c) Among these three point force between coil and solenoid is maximum at point 2





(d) Among these three point force between coil and solenoid is maximum at point 1

- Q 8. A semi-circular current carrying wire having radius R is placed in x-y plane with its centre at origin O. There is a position x dependent non-uniform magnetic field  $\vec{B} = \frac{B_0 x}{2R} \hat{k}$  (here B<sub>0</sub> is positive constant) existing in the region. The force due to magnetic field acting on the semi-circular wire will be along :
  - (a) negative x-axis
  - (b) positive x-axis
  - (c) negative y-axis
  - (d) positive y-axis
- Q 9. In the figure shown a current  $I_1$  is established in the long straight wire AB. Another wire CD carrying current  $I_2$  is placed in the plane of the paper. The line joining the ends of this wire is perpendicular to the wire AB. The resultant force on the wire CD is-

Β¦

 $I_1$ 

А


- (a) zero
- (b) towards negative x-axis
- (c) towards positive y-axis
- (d) none of these
- Q 10. A uniform magnetic field  $\vec{B} = 3\hat{i} + 4\hat{j} + \hat{k}$  exists in region of space. A semicircular wire of radius 1 m carrying current 1 A having its centre at (2, 2, 0) is placed in x-y plane as shown in figure. The force on semicircular wire will be-

(a) 
$$\sqrt{2} (\hat{i} + \hat{j} + \hat{k})$$
  
(b)  $\sqrt{2} (\hat{i} - \hat{j} + \hat{k})$   
(c)  $\sqrt{2} (\hat{i} + \hat{j} - \hat{k})$   
(d)  $\sqrt{2} (-\hat{i} + \hat{j} + \hat{k})$ 

Q 11. A hypothetical magnetic field existing in a region is given by  $\vec{B} = B_0 \hat{r}$ . Where  $\hat{r}$  denotes the unit vector along the radial direction. A circular loop of radius a carrying a current i, is placed with its plane parallel to the x-y plane and centre at (0, 0, d). The magnitude of magnetic force acting on the loop is-

(a) 
$$\frac{2\pi a^2 i B_0}{d}$$
(c) 
$$\frac{\pi a^2 i B_0}{d}$$

(b) 
$$\frac{2\pi a^2 i B_0}{\sqrt{a^2 + d^2}}$$
  
(d)  $\frac{\pi a^2 i B_0}{\sqrt{a^2 + d^2}}$ 





Q 12. A straight wire of length I can slide on two parallel plastic rails kept in horizontal plane with a separation d. The coefficient of friction between the wire and the rails is μ. If the wire carries current i what minimum magnetic field should exist in the space in order to slide the wire on the rails ?

(a)  $\frac{\mu mg}{il\sqrt{1+\mu^2}}$ (c)  $\frac{\mu g^2 m}{il}$ 

(b)  $\frac{\mu m^2 g}{il}$ (d)  $\frac{\mu mg}{l}$ 



## **Answer Key**

Q.1 a	Q.2 c	Q.3 c	Q.4 b	Q.5 a
Q.6 a, d	Q.7 b, c	Q.8 a	Q.9 d	Q.10 b
Q.11 b	Q.12 a			