


DPP -3 (EMI)

Video Solution on Website :- <https://physicsaholics.com/home/courseDetails/104>

Video Solution on YouTube:- <https://youtu.be/Ci0tF4qT7X0>

Written Solution on Website:- <https://physicsaholics.com/note/notesDetails/65>

- Q 1. Figure shows a uniform magnetic field B confined to a cylindrical volume and is increasing at a constant rate. The instantaneous acceleration experienced by an electron placed at P is



- (a) zero (b) towards right
(c) towards left (d) upwards

- Q 2. Consider cylindrical region of the magnetic field shown in the figure. Region I and II have fields directed perpendicularly outward and inward respectively. Fields are varying with time as

Region I : $B = 3B_0 t$


Region II : $B = B_0 t$

such that there is no net induced electric field in the region $r > r_2$, find $\frac{r_1}{r_2}$?




- (a) 0.5 (b) 0.6 (c) 0.8 (d) 0.2

- Q 3. A variable magnetic field creates a constant emf 11 V in a conductor ABCDA. The resistances of portion ABC, CDA and AMC are 1 ohm, 2 ohm and 3 ohm respectively. What current will be shown by meter M? The magnetic field is concentrated near the axis of the circular conductor.

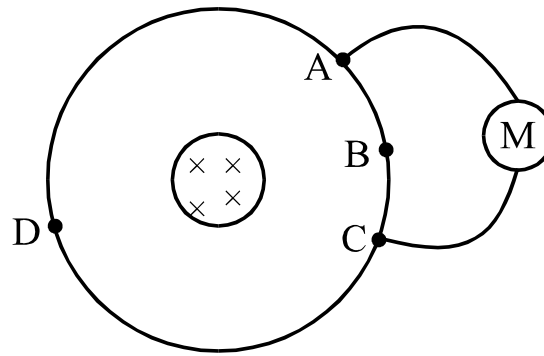


- (a) 1 A (b) 2 A (c) 3 A (d) 4A

Q 4. A triangular wire frame (each side = 2m) is placed in a region of time variant magnetic field having $\frac{dB}{dt} = \sqrt{3}T/s$. The magnetic field is perpendicular to the plane of the triangle. The base of the triangle AB has a resistance 1 ohm while the other two sides have resistance 2 ohm each. The magnitude of potential difference between the points A and B will be

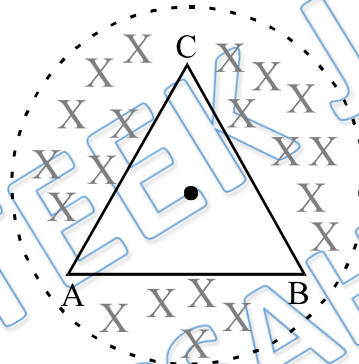

- (a) Zero
(b) .2 V
(c) .4 V
(d) .6 V


Q 5. An equilateral triangle ABC of side a is placed in the magnetic field with side AC and its centre coinciding with the centre of the magnetic field. The magnetic field varies with time as $B = kt$. The emf induced across side AB is



- (a) $\frac{\sqrt{3}}{4}a^2k$ (b) Zero (c) $\frac{\sqrt{3}}{8}a^2k$ (d) $\frac{(\sqrt{2}-1)}{2}a^2k$




- Q 6. A circular loop of wire of radius r rotates about z -axis with angular velocity ω . The normal to the loop is always perpendicular to z axis. At $t = 0$, normal parallel to y axis. An external magnetic field $\vec{B} = B_y \hat{j} + B_z \hat{k}$ is applied. The EMF induced in the loop at time ' t ' -




- (a) $\pi r^2 \omega B_y \sin \omega t$ (b) $\pi r^2 \omega B_z \cos \omega t$
 (c) $\pi r^2 \omega B_z \sin \omega t$ (d) $\pi r^2 \omega B_y \cos \omega t$

- Q 7. A uniform but time varying magnetic field is present in a circular region of radius R . The magnetic field is perpendicular and into the plane of the loop and the magnitude of field is increasing at a constant rate α . There is a straight conducting rod of length $2R$ placed as shown in figure. The magnitude of induced emf across the rod is.



- (a) $\pi R^2 \alpha$ (b) $\frac{\pi R^2 \alpha}{2}$ (c) $\frac{R^2 \alpha}{\sqrt{2}}$ (d) $\frac{\pi R^2 \alpha}{4}$

- Q 8. In figure (a) a solenoid produce a magnetic field whose strength increases into the plane of the page. An induced emf is established in a conduction loop surrounding the solenoid, and this emf lights bulbs A and B. In figure (b) point P and Q are shorted. After the short is inserted

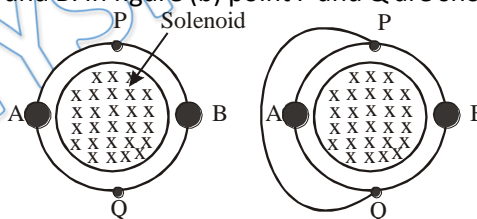

- (a) Bulb A goes out bulb B gets brighter
 (b) Bulb B goes out bulb A gets brighter
 (c) Bulb A goes out bulb B gets dimmer
 (d) Bulb B goes out bulb A gets dimmer

- Q 9. A uniform circular ring of radius R , mass m has uniformly distributed charge q . The ring is free to rotate about its own axis (which is vertical) without friction. In the space, a uniform magnetic field B , directed vertically downwards, exists in a cylindrical region of magnetic field is coaxial with the ring and has radius ' r ' greater than R . If magnetic field starts increasing at a constant rate α , angular acceleration of the ring will be


- (a) $\frac{qR\alpha}{2mr}$ (b) $\frac{q\alpha}{2m}$



(c) $\frac{qR\alpha}{mr}$

(d) $\frac{qR\alpha}{m}$

- Q 10. There is a horizontal cylindrical uniform but time varying magnetic field increasing at a constant rate $\frac{dB}{dt}$ as shown. A charged particle having charge q and mass m is kept in equilibrium, at the top of a spring of spring constant K in such a way that it is on the horizontal line passing through the center of the magnetic field as shown in figure. The compression in the spring will be

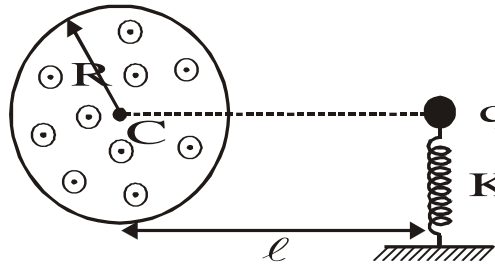


(a) $\frac{1}{K} \left[mg - \frac{qR^2}{2\ell} \frac{dB}{dt} \right]$

(b) $\frac{1}{K} \left[mg + \frac{qR^2}{\ell} \frac{dB}{dt} \right]$

(c) $\frac{1}{K} \left[mg + \frac{2qR^2}{\ell} \frac{dB}{dt} \right]$

(d) $\frac{1}{K} \left[mg + \frac{qR^2}{2\ell} \frac{dB}{dt} \right]$

- Q 11. A cylindrical region of uniform magnetic field exists perpendicular to plane of paper which is increasing at a constant rate $\frac{dB}{dt} = \alpha$. The diameter of cylindrical region is ℓ . A non-conducting rigid rod of length ℓ having two charged particles is kept fixed on the diameter of cylindrical region w.r.t. inertial frame. If two charged particles having charges q each is kept fixed at the ends of the non-conducting rod. The net electromagnetic force on system is

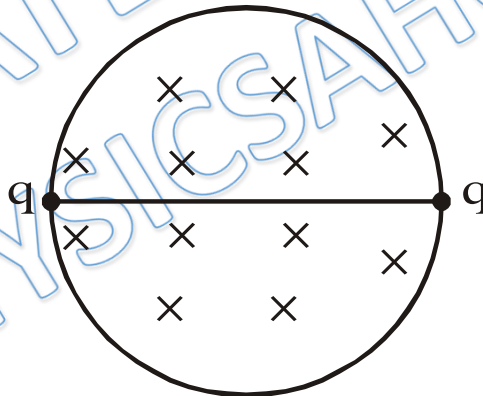


(a) $\frac{q\ell\alpha}{4}$

(b) $\frac{q\ell\alpha}{2}$

(c) Zero


(d) $q\ell\alpha$

- Q 12. A wire shaped as a semi-circle of radius a rotates about an axis OO' with an angular velocity ω in a uniform magnetic field of induction B (shown in figure). The rotation axis is perpendicular to the field direction. The total resistance of the circuit is equal to R . Neglecting the magnetic field of induced current, calculate the mean amount of thermal power being generated in the loop during one rotation period and express it in the form : $P_{\text{mean}} = B^m a^n \omega^p \times \text{constant}$. Find the value of p .

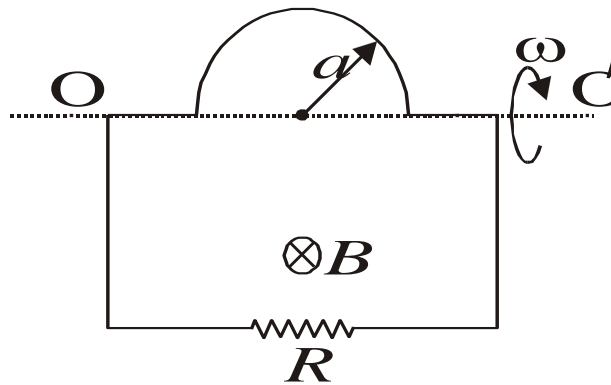

- (a) 1 (b) 2 (c) 4 (d) 0

Q 13. A uniform magnetic induction field B_0 exists in a cylindrical region of radius R . A nonconducting ring of radius a ($a > R$) is placed co-axially with the field region. The ring has mass 'm' and linear charge density λ . The angular velocity gained by the ring if the field is switched off is

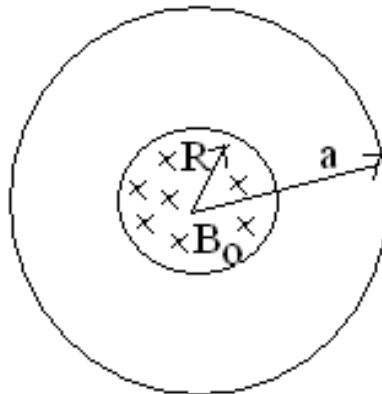

- (a) $\frac{\lambda\pi B_0 a^2}{mR}$ (b) $\frac{\lambda\pi B_0 a^2}{2mR}$ (c) $\frac{\lambda\pi B_0 R^2}{ma}$ (d) $\frac{\lambda\pi B_0 R^2}{2ma}$

Answer Key

Q.1 b	Q.2 a	Q.3 a	Q.4 c	Q.5 c
Q.6 a	Q.7 d	Q.8 a	Q.9 b	Q.10 d
Q.11 c	Q.12 b	Q.13 c		